

POWerval CALIBRE FUSE 32V



- Designed for high current circuit protection to protect starter cables.
- Ideal for starter and alternator connectors.
- These fuses allow the load of a starter motor or winch to operate without blowing the fuse, however they will open in the case of a direct short.



Part Number	Continuous Rated Current	Min. Melting Current	Max. Melting Current	Cable Size (mm ²)	Body Colour
POWCAL1	150A	380A	2000A	16	Grey
POWCAL2	150A	400A	2000A	25	Black
POWCAL3	180A	530A	2000A	50	Red
POWCAL4	180A	600A	2000A	50	Brown
POWCAL5	180A	700A	2000A	50	Wheat

Voltage: 32VDC **I.R.:** 2000A at 32VDC



Characteristic: Slow Acting

Mounting: M8 or 5/16" studs

Terminal: (POWCAL1 - 2) Tin Plated Zinc Alloy.
(POWCAL3 - 5) Tin plated Copper.

Pack Size: 1, 10, 100

Approvals:

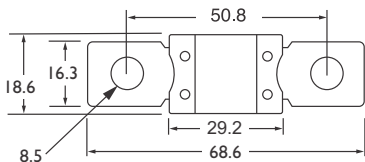

Dimensions in MM

RELATED PRODUCTS:



Inline Fuse Holder



Fuse Block



Fused PDU

Scan this QR Code for more information



QR Code: 3004

FUSE STRIP WITH HOUSING 48V - 80V

Part Number	Ampere Rating		Part Number	Ampere Rating
FBT030	30A	NEW	FBT250	250A
FBT035	35A		FBT275	275A
FBT040	40A		FBT300	300A
FBT050	50A		FBT325	325A
FBT060	60A		FBT350	350A
FBT080	80A		FBT355	355A
FBT100	100A		FBT400	400A
FBT125	125A		FBT425	425A
FBT130	130A		FBT500	500A
FBT150	150A		FBT600	600A
FBT175	175A		FBT675	675A
FBT200	200A		FBT750	750A
FBT225	225A		FBT800	800A

NEW



Straight Fork and 90 Degree Type Lugs

Voltage: 48VDC (30A-425A), 80VDC (500A-800A)

I.R.: 2.5kA at 48VDC, 3kA at 80VDC.

Characteristic: Fast Acting

Mounting: M10 or 3/8" studs.

Feature: Element window.

Pack Size: 1, 10, 20, 50



Approvals: DIN 43560, IEC60269-4, TUV

UL 248

RELATED PRODUCT:



Fuse Block & Cover

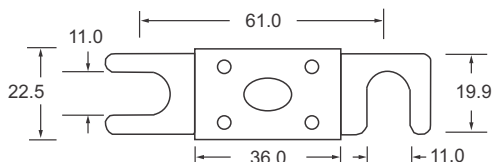

Dimensions in MM