

3AG 32V IN-LINE HOLDER & 20A FUSE

Prolec

Part Number	Description
I55020A	20A bayonet holder

Voltage: 32V

Temperature Rating (RTI): 140°C

Wire Thickness: 2mm² # 14 AWG

Wire Length: 480mm loop

Pack Size: 1, 10, 100, 1000

Feature: *Includes AGC 20A fuse.




Spare Pack (SP):
Contains 1 fuse holder.



*AGC020 Fuse
6.35 x 31.8mm

Dimensions in MM



3AG 32V IN-LINE HOLDER

Prolec

Part Number	Holder Type
I55120A	20A twist lock holder

Voltage: 32V

Body: Black Nylon PA66

Rivets: Tin / Nickel plated bronze

Wire Thickness: 2mm² # 14 AWG

Wire Length: 200mm loop


Pack Size: 1, 10, 100, 1000



Spare Pack (SP):
Contains 1 fuse holder.

RELATED PRODUCTS:

3AG Fuses see page 17



Dimensions in MM

LOW PROFILE MINI FUSE IN-LINE HOLDER SPLASH PROOF

Prolec

Part Number	Description
FHL002	30A holder with fuse cover

Voltage: 58VDC

Body: Black Nylon PA66

Terminals: Tin/Nickel plated Bronze

Wire Gauge: 3mm² # 12AWG Red

Wire Length: 2 x 133mm lengths of wire.

Pack Size: 1, 10, 100, 1000


Notes: Fuse is not included.



Spare Pack (SP):
Contains 1 fuse holder.

RELATED PRODUCTS:

L.P Minifuse see page 21

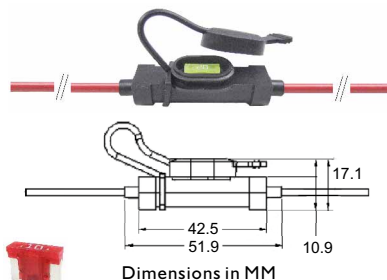

Dimensions in MM

IPxx

58V

MICRO2 IN-LINE HOLDER SPLASH PROOF

Prolec

Part Number	Description
FHC002	30A holder with fuse cover

Voltage: 32V

Wire: 3mm² # 12AWG stranded.
305mm red wire loop.

Body: Black PVC.

Terminals: Tin plated brass.


Pack Size: 1, 10, 100, 1000.




Spare Pack (SP):
Contains 1 fuse holder.

RELATED PRODUCTS:

Micro2 fuse see page 18



Dimensions in MM



NEW

IPxx