

3AG 32V IN-LINE HOLDER

EATON Bussmann

Part Number Holder Type
HHB-R Snap-lock

Rating: 30A

Voltage: 32VAC

Body: Nylon (high visibility yellow colour)

Crimp: Simple crimp assembly, copper tin plated.

Flammability: UL 94 V2

Wire Thickness: Accepts 1 - 3mm² (# 16-12 AWG copper wire). Wire not included.


Crimp Tools: Thomas & Betts ERG-2001, Channelock No.909, General Electric - U.S. & Metric Electrical Terminal Tool.

Assembled Holder Option: Can be ordered assembled with # 14 AWG insulated leads in lengths of either 204mm or 483mm (lead colour options: red, black, yellow). Contact sales for further information.

Pack Size: 1, 10, 100

Notes: Snap-lock connection. Suits all fuse types 7AG, 8AG and 3AG.

Approvals: 



Dimensions in MM

With Fuse Installed	"A" Dimension
7AG (AGW)	53.34mm
8AG (AGX)	57.19mm
3AG (AGC)	61.5mm

3AG 32V SPLASH PROOF IN-LINE HOLDER

EATON Bussmann

Part Number Holder Type
HFB-R Push Together

Rating: 30A

Voltage: 32V

Body: Yellow Thermoplastic Rubber (one piece)

Contacts: Tin plated copper

Flammability: UL 94 HB


Wire Thickness: 0.8 - 3mm² (# 12 - 18 AWG) Wire not included.

Pack Size (bag): 10, 100, 1000

Crimp Tools: Thomas & Betts - WT-11-M, Radio Shack 64-409.

Notes: Withstands many organic solvents, rigorous shock and vibration. High visibility yellow colour.

Approvals: 



Dimensions in MM

3AG 250V WATERPROOF IN-LINE HOLDERS

EATON Bussmann

Part Number Holder Type
HFA-R Bayonet Type

Rating: 20A

Voltage: 250V

Body: Phenolic

Flammability: UL 94 HB

Temperature Rating (RTI): 150°C

Contacts: Copper crimp

Terminal Type: Crimp



Wire Thickness: 1 - 3mm² (# 12 to # 16AWG) Wire not included.

Crimp tools: Thomas & Betts (WT-112M or ERG-2002), Channelock No. 909.

Pack Size (bag): 10, 100, 1000

Approvals: 

HFA-R recognized with use of No. 12 AWG copper conductors secured with Thomas & Betts crimping tool (WT-180).

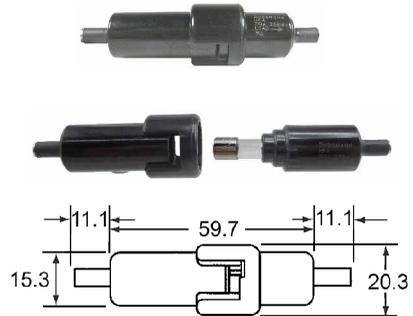

Dimensions in MM

RELATED PRODUCTS:

Fuses: 3AG / 3AB p16-17

