

MICRO3 FUSE DUAL ELEMENT 32V

Littelfuse
Fast Acting

The MICRO3™ fuse has 3 terminals and 2 fuse elements with a common center terminal. Its sub-miniature design meets the need for more circuits to be protected while utilizing less space and its ability to cope with high temperatures in adverse environments makes the MICRO3™ fuse of recommended choice for protection.

Part Number	Ampere Rating	Body Colour
MICR3005	5A	Tan
MICR307.5	7.5A	Brown
MICR3010	10A	Red
MICR3015	15A	Blue




- I.R.:** 1000A at 32VDC
- Voltage:** 32VDC
- Housing:** PA66
- Terminals:** Zinc alloy, silver plated.
- Temperature Range:** -40 °C to +105 °C
- Pack Size:** 5, 10, 100, 500
- Holders:** Contact sales.
- Features:** 2 fuse elements in 1 fuse.
- Approvals:** RoHS

Spare Pack (SP):
Contains 5pcs per rating.



4 piece Assortment Pack (MICR3000AP): NEW
Includes 1pc of each of the following ratings:
5A, 7.5A, 10A, 15A

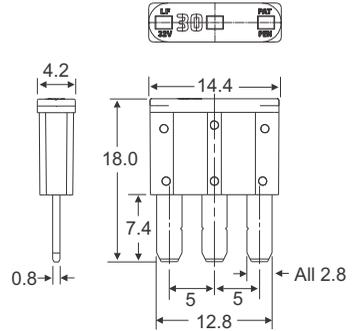

Dimensions in MM



Micro2 Fuse



Micro3 Fuse


Micro2 Fuse

← Mcase Fuse Page24

← Micro3 Fuse



Micro3 Fuse Circuit Diagram



Time Characteristic % of Amp Rating	Opening Time Minimum / Maximum	
	110%	100 hrs
135%	0.75 sec	120 sec
160%	0.30 sec	50 sec
200%	0.15 sec	5 sec
350%	0.04 sec	0.50 sec
600%	0.02 sec	0.10 sec

RELATED PRODUCTS:

- Retail Assortments see page 38
- Fuse Assortment Kits see page 38
- Fuse Puller see page 42

Fuse Puller



Fuse Assortment Kit

