

# MAXI FUSE IN-LINE HOLDER

Littelfuse

Part Number	Description
I52001KIT1	Fuse holder kit, includes fuse holder body, cover, screws & terminals (2.5 - 6mm <sup>2</sup> ).
I52001KIT2	Fuse holder kit, includes fuse holder body, cover, screws & terminals (5 - 10mm <sup>2</sup> ).
I52001	Fuse holder body 60A
I52900	Fuse holder clear cover
913-550	M5 x 8 Screw and split washer
913-653	Ring tongue terminal, 2.5 - 6mm <sup>2</sup> (#12-10AWG)*
913-654	Ring tongue terminal, 5 - 10mm <sup>2</sup> (#10-8AWG)*



**Rating:** 60A  
**Voltage:** 32VDC  
**Terminals:** Copper alloy  
**Body:** Black thermoplastic (UL 94HB)  
**Cover:** Translucent thermoplastic  
**Pack Size:** 1, 10, 100  
**Features:** Only 2 fuse blocks may be ganged together with a maximum fuse rating of 50A per block.  
**Notes:** This product will only accept original Littelfuse Maxi blade fuses (299 / 999 series). Fuse is not included.  
 \*It is recommended that cross linked polyethylene (GLX) insulated wire be used. Contact sales for more information.




**Spare Pack (SP):**  
 Contains 1 fuse holder kit.



Clear Cover

Fuse Holder Body

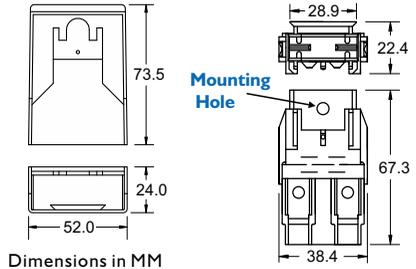

## RELATED PRODUCTS:


Maxi fuse (see page 23)

# MAXI FUSE IN-LINE HOLDER SPLASH PROOF

Prolec

Part Number	Description
MFHC	60A with splash proof cover

**Rating:** 60A  
**Voltage:** 32VDC  
**Wire:** 2 x 150mm leads of #6AWG red.  
**Body Material:** PVC  
**Pack Size:** 1, 10, 100  
**Notes:** Protective cover permits use in harsh under hood environments.

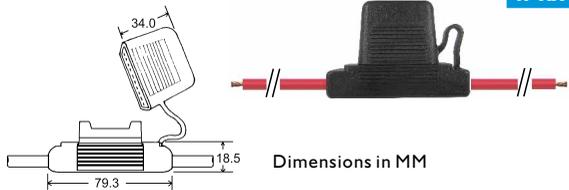


IPxx

# MAXI FUSE IN-LINE HOLDER SPLASH PROOF

Littelfuse

Part Number	Description
MAHC0001	60A with splash proof cover

**Rating:** 60A  
**Voltage:** 32VDC  
**Wire:** Includes 2 x 127mm leads of #6AWG.  
**Pack Size:** 1, 10, 100  
**Feature:** Mounting hole also permits easy bulkhead installation. Mounting hole permits 2 or more holders to be mounted together.  
**Notes:** Protective cover permits use in harsh under hood environments.  
**Approvals:** RoHS

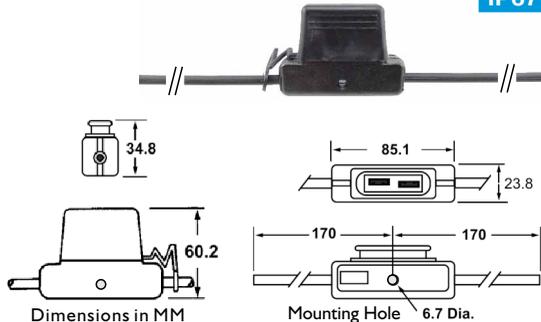

IP67

**RELATED PRODUCTS:**  
 Maxi fuse see page 23