



12VDC Automatic TI Metal Case	12VDC Modified TII Metal Case	12/24VDC Manual TIII Plastic Case	24VDC Automatic TI Metal Case	24VDC Modified TII Metal Case	Ampere Rating
19108-01M	19208-01M	19308-01P	19408-01M	19508-01M	8A
19110-01M	19210-01M	19310-01P	19410-01M	19510-01M	10A
19115-01M	19215-01M	19315-01P	19415-01M	19515-01M	15A
19120-01M	19220-01M	19320-01P	19420-01M	19520-01M	20A
19125-01M	19225-01M	19325-01P	19425-01M	19525-01M	25A
19130-01M	19230-01M	19330-01P	19430-01M	19530-01M	30A
19135-01M	19235-01M	19335-01P	19435-01M	19535-01M	35A
19140-01M	19240-01M	19340-01P	19440-01M	19540-01M	40A
19150-01M	-	19350-01P	19450-01M	-	50A

- I. R.:** 150A at 14VDC (8A to 10A)
 225A at 14VDC (15A)
 300A at 14VDC (20A)
 450A at 14VDC (25A to 30A)
 600A at 14VDC (35A to 40A)
 750A at 14VDC (50A)

Voltage: 14VDC (191, 192, 193 series)
 28VDC (193, 194, 195 series)

Operating Temp: -40°C to 85°C

Storage Temp: -40°C to 125°C

Features: Ignition Protected

Pack Size: Stock lines 1 pc, indent items 250pcs

Termination Notes: Also available with auto blade terminals. Contact sales for further information.

Notes: Metal cover aids heat dissipation. Mandatory for Modified Resets and recommended, but not mandatory on Auto Resets.

Manual Reset button available in two colour choices.

Part Number suffix -1 (Black) and -2 (White).

Approvals: SAE J553, J1171




**Automatic TI
Metal Case
(No Button)**



**Manual TIII
Plastic Case
(With Reset Button)**

CIRCUIT BREAKERS

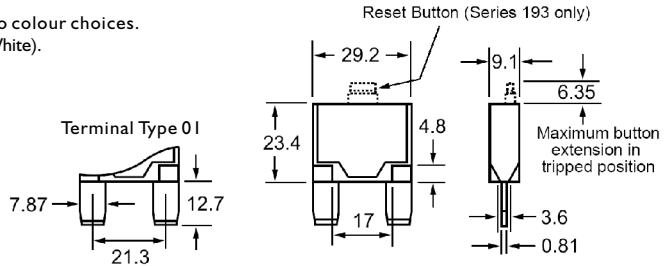

All dimensions are in MM

RELATED PRODUCTS:

Maxi Blade Fuse / Circuit Breaker Blocks

Also available with:

- Covers
- Mounting Brackets
- Module Frames
- Module Joiners



01470
6 x Maxi fuses/Breakers
With Common M8 Feed



01600
3 x Maxi fuses/Breakers
6 x Auto fuses

These blocks can be found on page 119.